


MultiSync® UN462VA LCD 46" Video Wall Display

Datasheet

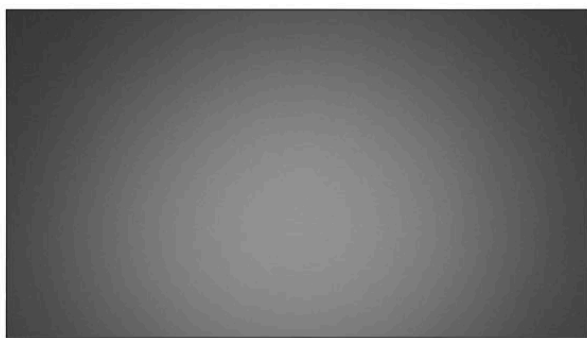

Turn every wall into an opportunity

The slim NEC MultiSync® UN462VA turns any wall into an opportunity to reliably display information like passenger information, restaurant menus, or corporate agendas. And it does so for less the price, while never sacrificing performance. These displays were made with busy spaces in mind – airports, train stations, casual dining restaurants and even mission-critical spots like control rooms – and optimised to project static and moving content. Designed with 500 cd/m² of brightness, these screens are easy to read under common light conditions. Installation and operation is a breeze. It comes equipped with powerful calibration capabilities, so the initial video wall setup requires minimal effort, while the long-term colour and brightness will maintain a striking homogeneity. The screen's frameless design forms a flat digital canvas that allows it to blend in and create one continuous image across multiple screens.

Benefits

Easy to install – it's simple to get your display up and running with its out-of-the-box calibrated picture pre-sets, managing colour settings and uniformity controlled by the SpectraView Engine — not to mention its simple, software-free calibration capabilities.

Accelerate your video wall configuration – set up your wall in no time with the display's powerful configuration capabilities, which include Auto ID/IP, Auto Tile Matrix, and Tile-/Frame Compensation. Enjoy flawless playback across your entire video wall.

Long-lasting continuous pictures – align your display with powerful calibration capabilities. Use the white copy function, colour drift correction, uniformity control, self-calibration and validation to create a continuous surface across multiple screens that gives the appearance of one, seamless wall.

Reliable image reproduction – best suited for static image reproduction with reliable accuracy in mission critical applications. Our PVA panel technology makes sure you have the best viewing experience with excellent contrast and black level.

Enhanced imaging performance – advanced settings of all relevant visual parameters allow full control of brightness, colour, gamma and uniformity via the SpectraView Engine for precise, natural images.

Future Ready with Open Modular Intelligence Expansion – upgrade the power of your display at any time by seamlessly integrating one of NEC's options for OPS Slot-in PCs, Raspberry Pi compute modules or signal interfaces for content feed and computing.

Safe and secure displays – each display is EMC class-B certified and ideally suited for critical emission environments that require safer standards than other displays do.

Product Information

Product Name	MultiSync® UN462VA
Product Group	LCD 46" Video Wall Display
Order Code	60004518

Display

Panel Technology	VA with Direct LED backlights
Active Screen Area (W x H) [mm]	1,018.1 x 572.7
Screen Size [inch/cm]	46 / 117
Aspect Ratio	16:9
Pixel Pitch [mm]	0.530
Brightness [cd/m ²]	500
Contrast Ratio (typ.)	3500:1
Viewing Angle [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Colour Gamut	72% of CIE 1976
Response Time (typ.) [ms]	8
Panel Refresh Rate [Hz]	60
Haze Level [%]	Pro (25)
Supported Orientation	Landscape; Portrait

Synchronisation Rate

Horizontal Frequency [kHz]	26 - 134
Vertical Frequency [Hz]	23 - 86

Resolution

Native Resolution	1920 x 1080
Supported on DisplayPort and HDMI	3840 x 2160; 1360 x 768; 1080i; 800 x 600; 1920 x 1080; 1280 x 1024; 1080p; 720p (50/60 Hz); 1600 x 1200; 1280 x 768; 1024 x 768; 640 x 480

Connectivity

Input Video Analogue	1 x VGA; Composite (RCA)
Input Video Digital	1 x DVI-D (with HDCP); 1 x OPS Slot; 2 x DisplayPort (with HDCP); 2 x HDMI (with HDCP)
Input Audio Analogue	2 x 3,5 mm jack
Input Audio Digital	2 x DisplayPort; 2 x HDMI
Input Control	1 x Remote Control (3.5 mm jack); 1 x RS232; 2 x LAN 100Mbit
Input Data	1 x microSD (MediaPlayer); 1 x USB 1.0 (Media Player); 1 x USB 2.0 (Downstream); 1 x USB 2.0 (Upstream); 2 x USB 1.0 (Compute Module, 1 x 5V/2A powered)
Output Video Digital	1 x DisplayPort (loop through: DisplayPort, OPS slot-in PC); 1 x HDMI (loop through: HDMI, OPS slot-in PC, MediaPlayer)
Output Audio Analogue	1 x 3,5 mm jack
Output Control	LAN 100Mbit

Calibration

Factory Calibration	Gamma; Intensity; RGB; Uniformity; White Point
Sensor Calibration (through USB)	PC-less Calibration with USB Sensor MDSV Sensor3; White Copy (post self-calibration)
Calibration with Software	Corner Uniformity; Gamma; Intensity; RGB; Update Factory Calibration; Update Uniformity Correction; White Point

Open Modular Intelligence

OPS Slot	Slot Technology: Open pluggable specification (NEC / Intel OPS standard)
OPS Max. Current / Power Consumption [A / W]	3.6 / 58
Compute Module Slot	Slot Technology: Compute Module Slot (NEC proprietary standard)

Sensors

Human Sensor	Optional, external, 4-5m range, triggered actions programmable
Temperature Sensor	Integrated, 3 sensors, triggered actions programmable
NFC Sensor	Integrated, 2cm range, free NEC Android App required

Electrical

Power Consumption Eco/max. [W]	290 (max.); 90 shipping
Power Savings Mode [W]	< 0.5; < 2 (Networked Standby)

Environmental Conditions

Operating Temperature [°C]	+0 to +40
Operating Humidity [%]	20 to 80
Storage Humidity [%]	10 to 90
Storage Temperature [°C]	-20 to 60

Mechanical

Dimensions (W x H x D) [mm]	Without stand: 1,022 x 577 x 101
Weight [kg]	Without stand: 21.4
Bezel Width [mm]	1.2 bottom/right; 2.3 top/left; 3.5
VESA Mounting [mm]	300 x 300 (FDMI); 4 holes; M6

MediaPlayer

Supported Image Formats	JPG (baseline, progressive, RGB, CMYK); max. resolution 5000 x 5000; PNG (interlace, alpha channel); max. resolution 4000 x 4000
Supported Video Formats	MP4 / MOV / FLV (video H.264, audio MP3, AAC); max. resolution 1080p at 30 Hz, 1080i at 60 Hz; MPG (video mpeg1/2, audio mpeg audio layer2/3, AAC-LC); MP @ ML, MP @ HL; WMV (video H.264, wmv advanced L3, wmv simple / main, audio mp3 wmv std); max. resolution 1080p at 30 Hz, 1080i at 60 Hz
Supported Audio Formats	MP3 (MP3); max. bit-rate 320 kBit/s; WAV (LPCM); max. 48 kHz sampling

Available Options

Accessories	Calibration kit (KT-LFD-CC2); Feet (ST-322); Overframe kit (KT-46UN-OF5); Remote control kit (KT-RC3); Speaker (SP-TF1); Wall mount (PD04VWM MFS 46-55 L/P; PD04VW QR 46-55 L/P; CK02XUN MFS 46 L/P)
Compute Module Slot	Raspberry Pi Compute Module 1 and 3
OPS Slot	Intel® Atom, Celeron and Core i3, i5, i7 Slot-in PCs

Green Features

Energy Efficiency	Annual energy consumption: 157 kWh (based on 4 operating hours per day); Carbon savings meter; Energy efficiency class: B; Human Sensor; LED backlight
-------------------	--

Additional Features

Special Characteristics	Auto ID assignment; Auto tiling function; Automatic Alarm E-Mails; DICOM Simulation; Frame Comp; HTTP Server; Image flip; Intelligent Wireless Data (based on NFC); NaViSet Administrator 2; PJLink Support; TileMatrix; USB Media Player; User input priority definition; User readable log function
Colour Versions	Black Front Bezel, Black Back Cabinet
Safety and Ergonomics	BSMI; CE; EAC; EMC Class B; FCC; PSB; RCM; REACH; RoHS; SASO; TÜV GS; TÜV S; UL/C-UL; VCCI
Pixel Failure Class	ISO 9241-307, Class 2
Audio	Optional Speakers (15 W + 15 W)
Plug and Play	VESA DDC/CI
Shipping Content	Display; DisplayPort Cable; HDMI Cable; LAN cable (RJ45); Power Cable
Warranty	3 years warranty incl. backlight; additional services available; optional 4. + 5. year warranty extension
Operating Hours	24/7



CE



RCM



RoHS



TÜV GS



VCCI

This document is © 2020 NEC Display Solutions Europe GmbH.

All rights reserved in favour of their respective owners. All hardware and software names are brand names and/or registered trademarks of the respective manufacturers. All specifications are subject to change without notice. Errors and omissions are excepted. 11.10.2020

* Model subject to availability in your region.

For, more information contact:

Display Square

+971 4 3300429

info@displaysquare.com | www.displaysquare.com

DISPLAY SQUARE

Copyright © 2020 Display Square All rights reserved. Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All data were deemed correct at time of creation. Display Square is not liable for errors or omissions. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognized and acknowledged.